

User Manual 16.2" High Resolution 1920 x 1200 LCD



LCD-AP-X17

Aluminum front bezel

LCD-NAP-X17

Front NEMA4 / IP65



LCD-OP-X17

Universal Mounting Open Frame



REACH

Legal Information

First English printing, October 2002

Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. We are not liable for any injury or loss that results from the use of this equipment.

Safety Instructions

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

- Unplug equipment before cleaning. Don't use liquid or spray detergent; use a moist cloth.
- Keep equipment away from excessive humidity and heat. Preferably, keep it in an air-conditioned environment with temperatures not exceeding 40° Celsius (104° Fahrenheit).
- When installing, place the equipment on a sturdy, level surface to prevent it from accidentally falling and causing damage to other equipment or injury to persons nearby.
- When the equipment is in an open position, do not cover, block or in any way obstruct the gap between it and the power supply. Proper air convection is necessary to keep it from overheating.
- Arrange the equipment's power cord in such a way that others won't trip or fall over it.
- If you are using a power cord that didn't ship with the equipment, ensure that it is rated for the voltage and current labeled on the equipment's electrical ratings label. The voltage rating on the cord should be higher than the one listed on the equipment's ratings label.
- Observe all precautions and warnings attached to the equipment.
- If you don't intend on using the equipment for a long time, disconnect it from the power outlet to prevent being damaged by transient over-voltage.
- Keep all liquids away from the equipment to minimize the risk of accidental spillage. Liquid spilled on to the power supply or on other hardware may cause damage, fire or electrical shock.
- Only qualified service personnel should open the chassis. Opening it yourself could damage the equipment and invalidate its warranty.
- If any part of the equipment becomes damaged or stops functioning, have it checked by qualified service personnel.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
 - ☐ Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
 - ☐ Repair or attempted repair by anyone not authorized by us.
 - ☐ Any damage of the product due to shipment.
 - ☐ Removal or installation of the product.
 - ☐ Causes external to the product, such as electric power fluctuation or failure.
 - ☐ Use of supplies or parts not meeting our specifications.
 - ☐ Normal wear and tear.
 - ☐ Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-position or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Contents

< Part. 1 > LCD-AP-X17 / NAP-X17

| | | |
|-----|----------------------------------|---------|
| 1.1 | Package Content | P.1 |
| 1.2 | Structure Diagram & Dimension | P.2 - 3 |
| 1.3 | Mounting Hardware & Installation | P.4 - 5 |

< Part. 2 > LCD-OP-X17

| | | |
|-----|----------------------------------|---------|
| 2.1 | Package Content | P.6 |
| 2.2 | Structure Diagram & Dimension | P.7 - 8 |
| 2.3 | Mounting Hardware & Installation | P.9 |

< Part. 3 > Specifications / OSD / Remote Controller

| | | |
|-----|---|-----------|
| 3.1 | Product Specifications | P.10 - 11 |
| 3.2 | On-screen Display Operation (OSD) | P.12 - 13 |
| 3.3 | Picture In Picture (PIP) / Picture By Picture (PBP) | P.14 - 15 |
| 3.4 | Remote Controller (RC-2) | P.16 |

< Part. 4 > Options

| | | |
|-----|--|-----------|
| 4.1 | Option Table | P.17 |
| 4.2 | 3G / HD / SD- SDI Broadcast-grade input | P.18 |
| 4.3 | MCS Multi-display control solution | P.19 |
| 4.4 | Resistive / Capacitive (1-point touch) | P.20 - 21 |
| 4.5 | DC Power : 12V / 24V / 48V / 125V / 250V | P.21 |
| 4.6 | MIL-type or lockable connector | P.22 |

Before Installation

- It is very important to mount the equipment in a suitable cabinet or on a stable surface.
- Make sure the place has a good ventilation, is out of direct sunlight, away from sources of excessive dust, dirt, heat, water, moisture and vibration.

Unpacking

The equipment comes with the standard parts shown in package content. Check and make sure they are included and in good condition. If anything is missing, or damaged, contact the supplier immediately.

How To Clean Your LCD Monitor



Caution :

- To avoid the risk of electric shock, make sure your hands are dry before unplugging your monitor from or plugging your monitor into an electrical outlet.
- When you clean your monitor, do not press down on the LCD screen. Pressing down on the screen can scratch or damage your display. Pressure damage is not covered under warranty.
- Use only cleansers made specifically for cleaning monitors and monitor screens. Cleansers not made to clean monitors and monitor screens can scratch the LCD display or strip off the finish.
- Do not spray any kind of liquid directly onto the screen or case of your monitor. Spraying liquids directly onto the screen or case can cause damage which is not covered under warranty.
- Do not use paper towels or abrasive pads to clean your monitor. Using an abrasive pad or any wood based paper product such as paper towels can scratch your LCD screen.

Cleaning Your Monitor

To clean your LCD safely, please follow these steps :

- ① Disconnect the power cord.
- ② Gently wipe the surface using a clean, dry microfiber cloth. Use as little pressure as possible.

Cleaning Tough Marks and Smudges

To remove tough marks and smudges, please follow these steps :

- ① Disconnect the power cord.
- ② Spray a small amount of non-abrasive cleanser on a microfiber cloth.



Caution : Do not spray or apply any liquids directly onto the monitor. Always apply the solution to your microfiber cloth first, not directly on the parts you are cleaning.

- ③ Gently wipe the surface. Use as little pressure as possible.
- ④ Wait until your monitor is completely dry before plugging it in and powering it up.

< Part 1 >

< 1.1 > Package Content - LCD-AP/NAP-X17 16.2" High Resolution LCD Display

LCD-AP-X17 / NAP-X17



16.2" High Resolution LCD display X 1

6ft VGA cable X 1


Power cord X 1

Remote controller X 1

Mounting hardware X 1 pack


- Mounting bracket x 4 pcs
- M4* 6mm screw x 8 pcs
- M4* 50mm screw x 8 pcs

Basic I/O

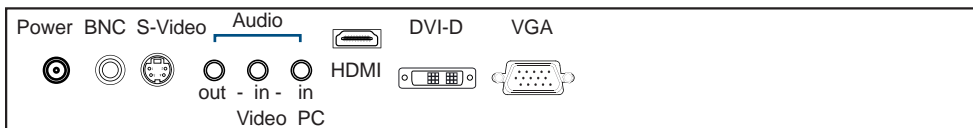

- An abundance of input connections that include HDMI, DVI-D, VGA, S-Video + BNC and audio
- On-chip Faroudja® DCDi Cinema processing

< 1.2 > Structure Diagram - LCD-AP / NAP-X17

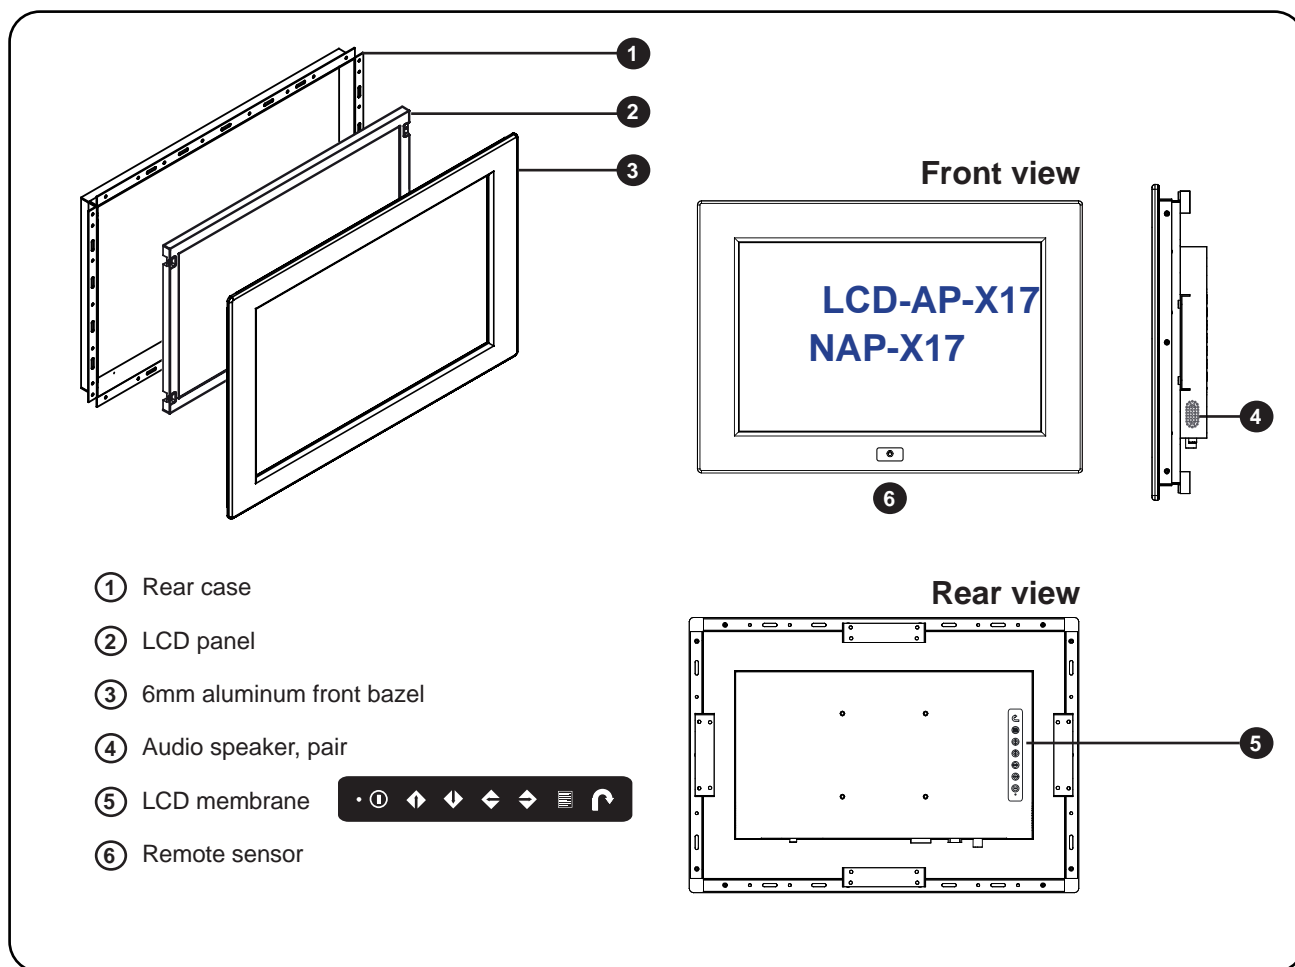


| Model | Product Dimension (W x D x H) | Packing Dimension (W x D x H) | Net Weight | Gross Weight |
|-------------------------------------|---|--|--------------------|--------------------|
| LCD-AP-X17 NAP-X17 | 468.5 x 57.1 x 331 mm 18.4 x 2.2 x 13 inch | 615 x 113 x 523 mm 24.2 x 4.4 x 20.6 inch | 4.9 kg 10.8 lbs | 7.7 kg 16.9 lbs |


< 1.2 > Dimension - LCD-AP / NAP-X17

16.2" High Resolution LCD Display


Front View

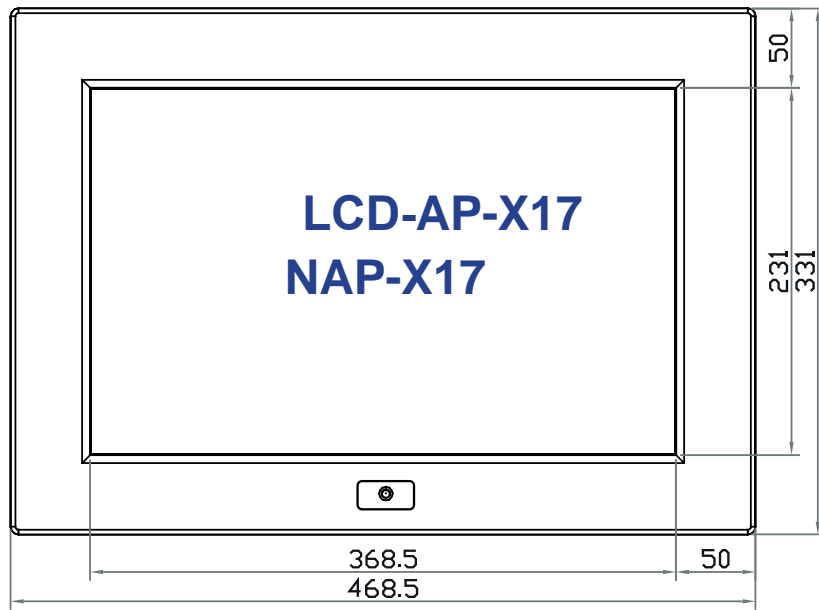

Side View

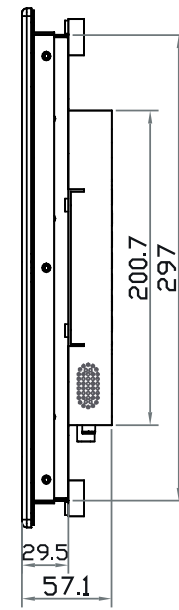


Rear View


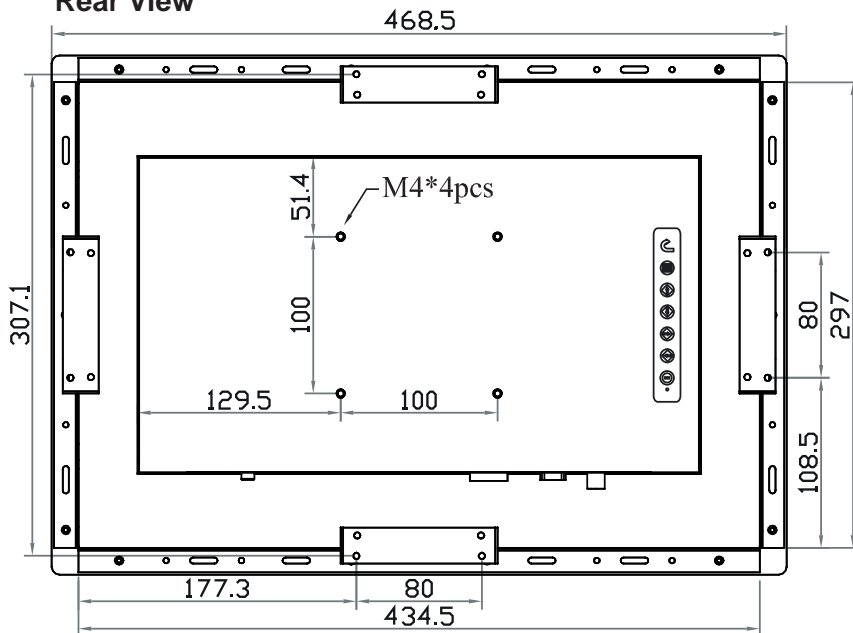


UNIT : mm
1mm = 0.03937 inch


Bottom View

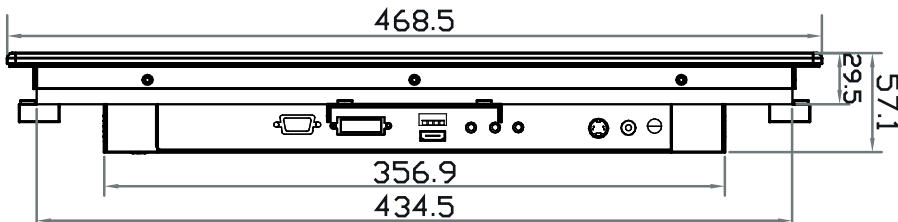

< 1.3 > Panel Mount Installation - LCD-AP / NAP-X17




Hardware set part no. UV-BK#2

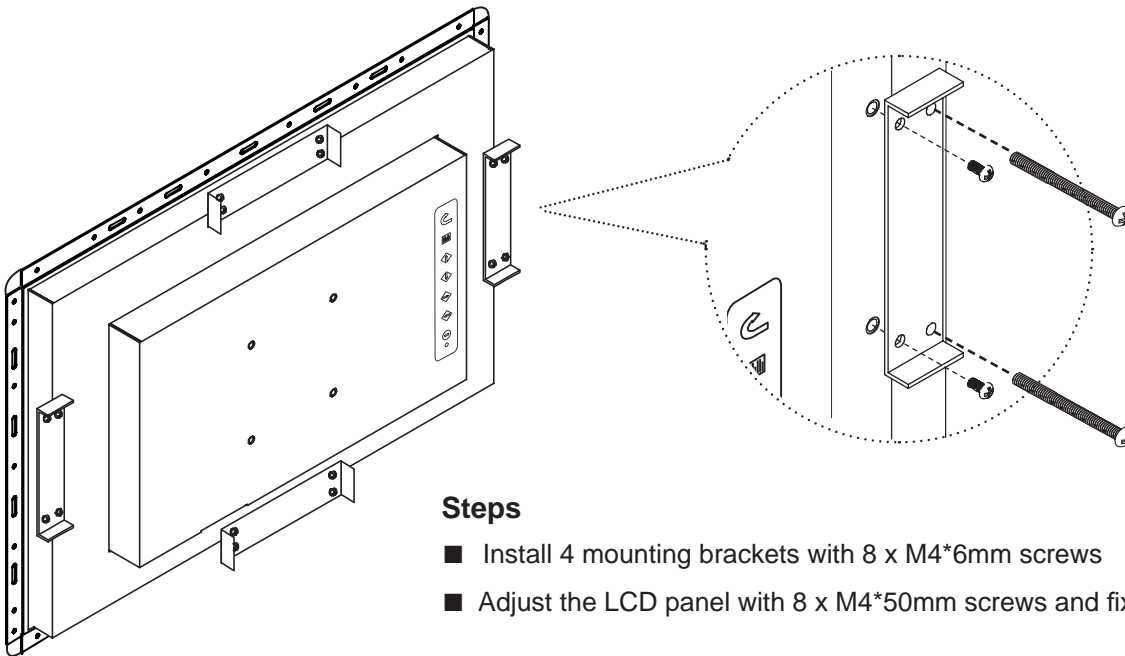

Steps

- Install 4 mounting brackets with 8 x M4*6mm screws
- Adjust the LCD panel with 8 x M4*50mm screws and fix it on the surface.

< 1.3 > VESA mount Installation - LCD-AP/NAP-X17 16.2” LCD Display

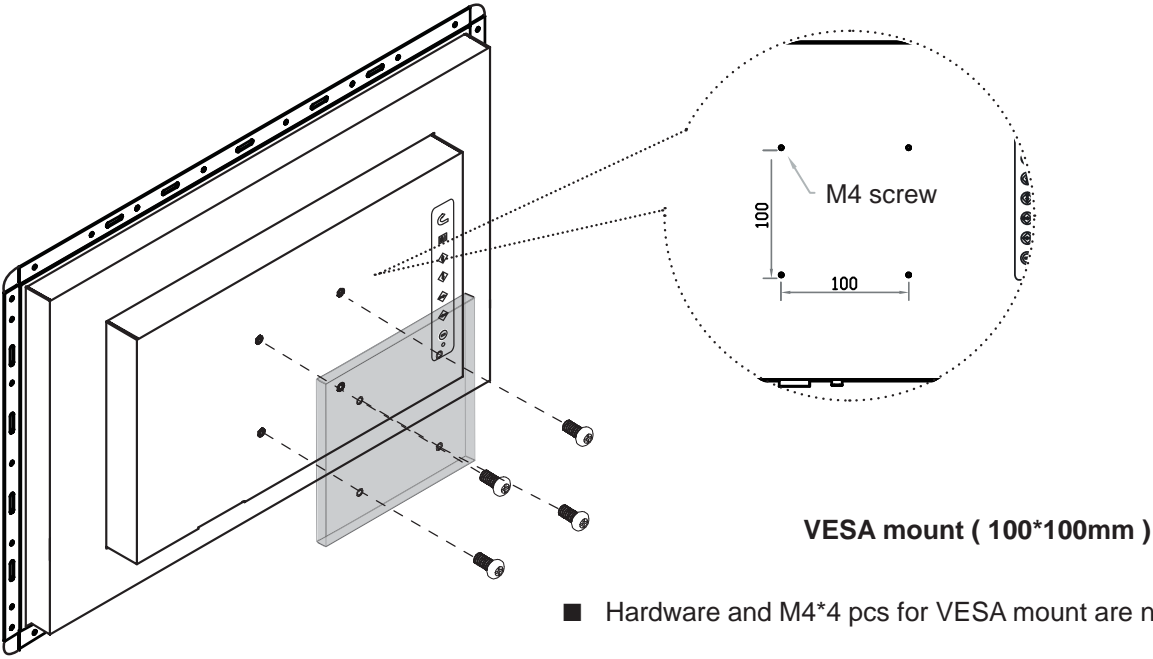

< Part 2 >

< 2.1 > Package Content - LCD-OP-X17

LCD-OP-X17




16.2" High Resolution LCD display X 1

6ft VGA cable X 1

Power cord X 1


Remote controller X 1

Basic I/O

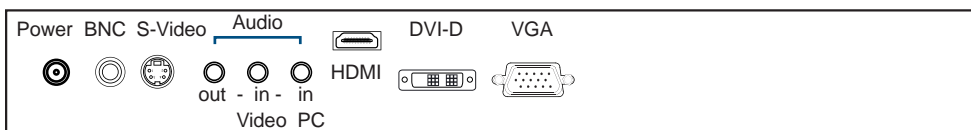

- An abundance of input connections that include HDMI, DVI-D, VGA, S-Video + BNC and audio
- On-chip Faroudja® DCDi Cinema processing


< 2.2 > Structure Diagram - LCD-OP-X17 16.2" High Resolution LCD Display

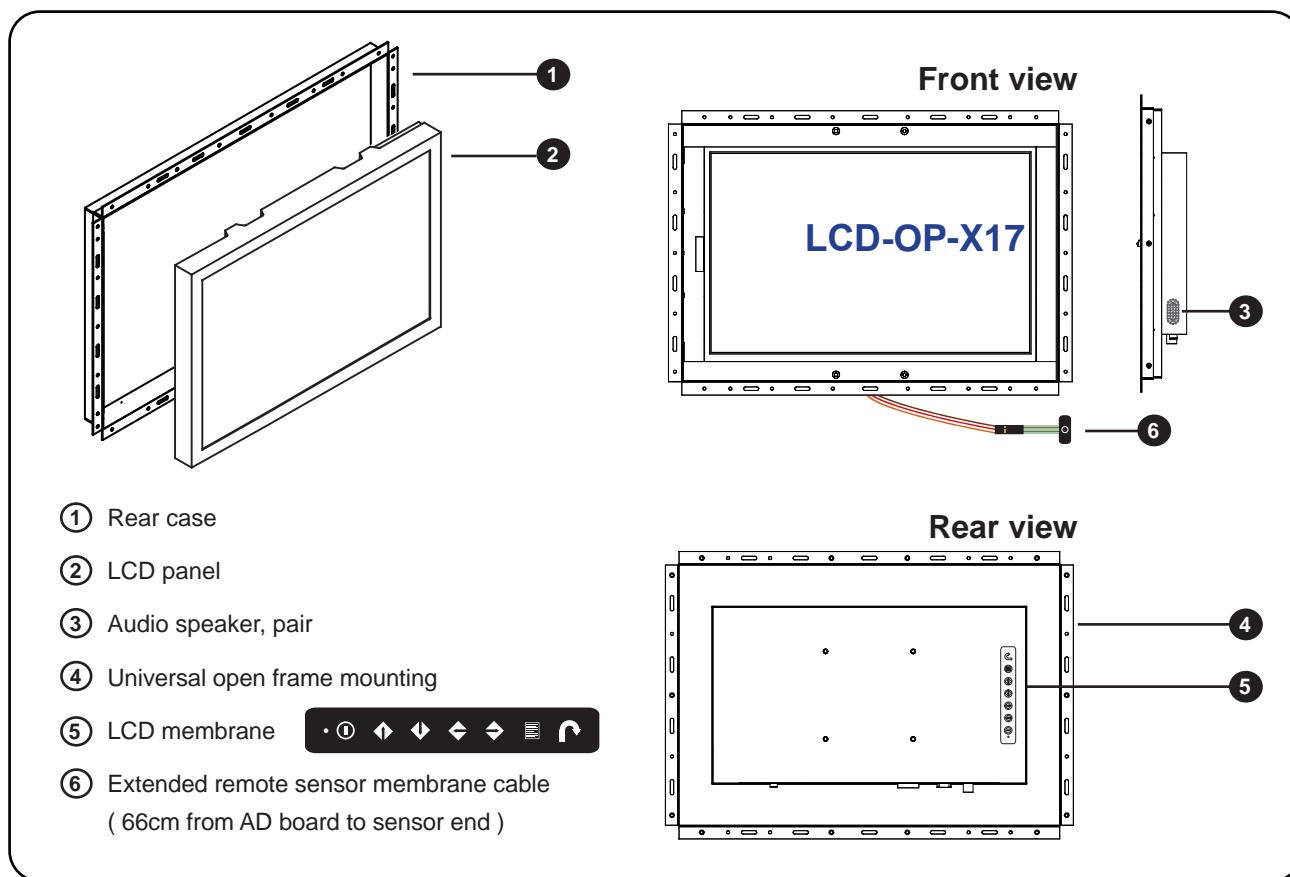


| Model | Product Dimension (W x D x H) | Packing Dimension (W x D x H) | Net Weight | Gross Weight |
|------------|---|--|-------------------|--------------------|
| LCD-OP-X17 | 465.5 x 50.6 x 328 mm 18.3 x 2 x 12.9 inch | 615 x 113 x 523 mm 24.2 x 4.4 x 20.6 inch | 3.8 kg 8.4 lbs | 6.5 kg 14.3 lbs |

< 2.2 > Dimension - LCD-OP-X17


Front View

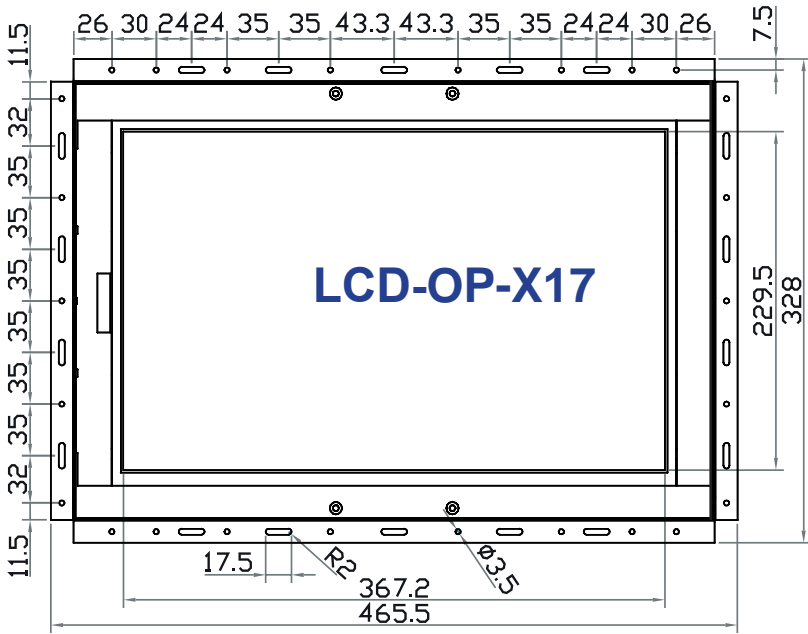

Side View

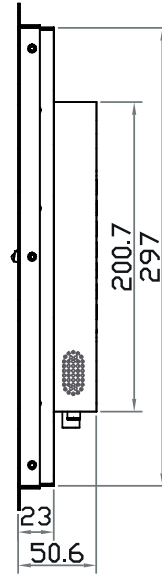


Rear View

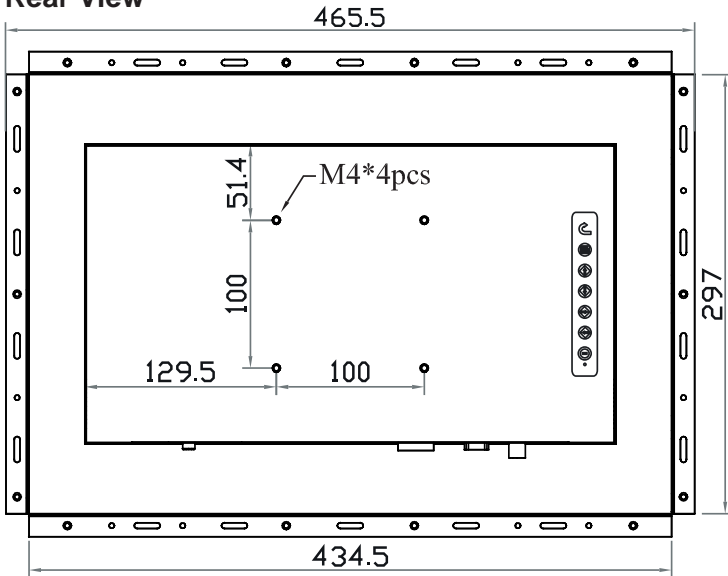


UNIT : mm

1mm = 0.03937 inch


Bottom View

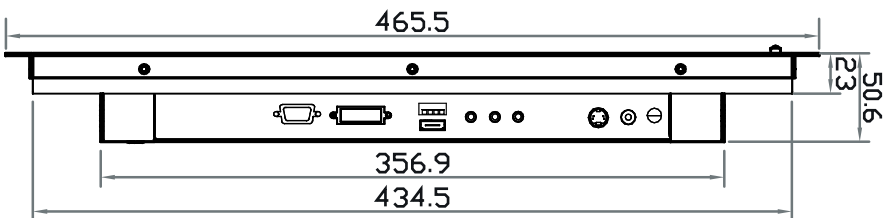

(I) Universal mount

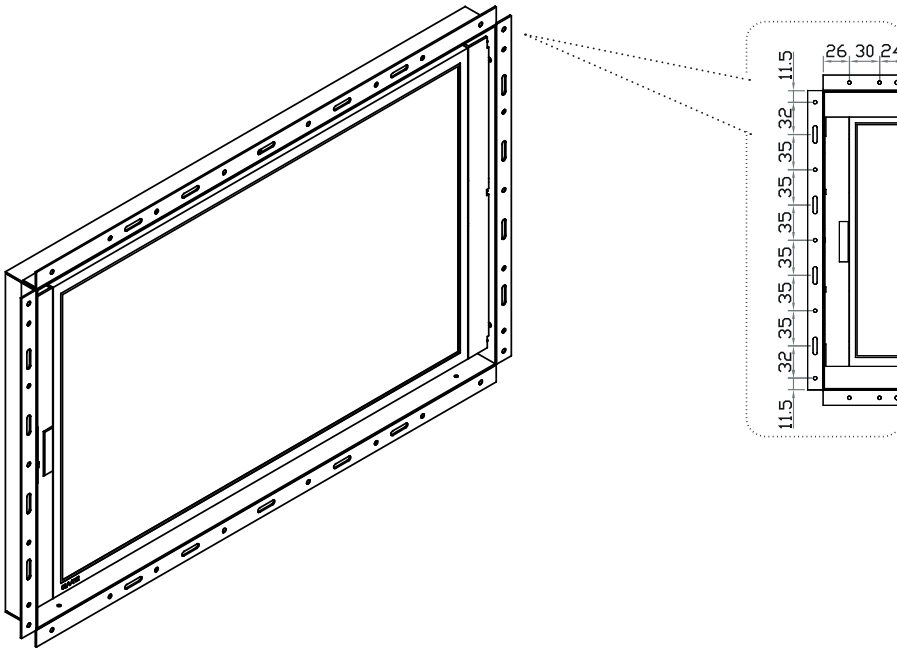

(II) VESA mount (100*100mm)

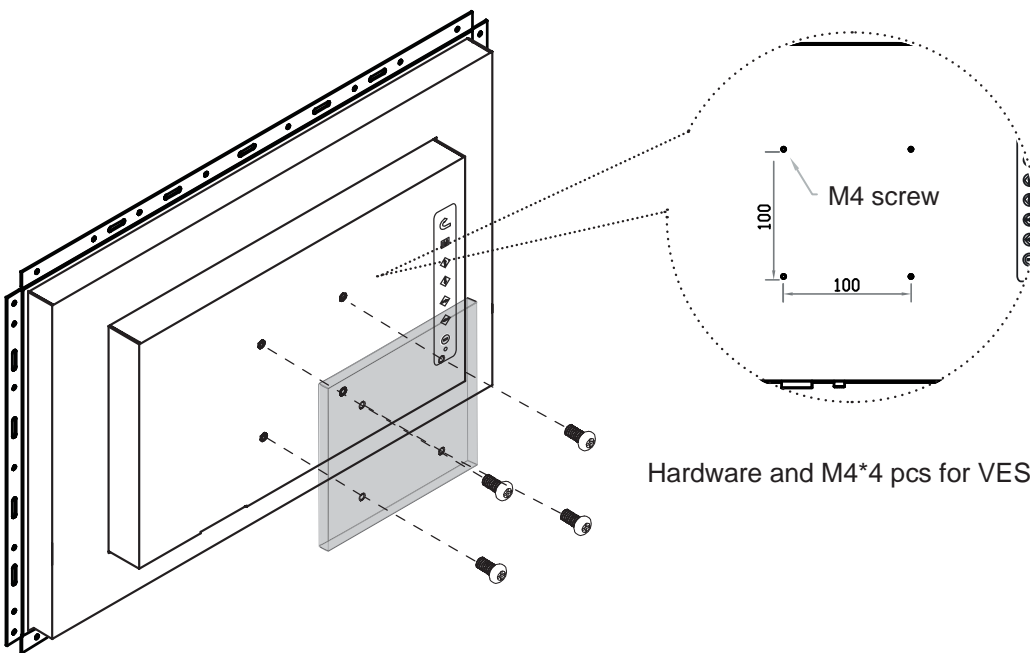

Hardware and M4*4 pcs for VESA mounting are not provided

< Part 3 >

< 3.1 > Product Specifications

| Mechanical Design | | LCD-AP/NAP-X17 | LCD-OP-X17 |
|-------------------|----------------|----------------------|-----------------|
| | Front Panel | Black, RAL 9005 | - |
| | Rear Casing | Black, RAL 9005 | Black, RAL 9005 |
| | VESA Mounting | 100 x 100mm | 100 x 100mm |
| | Other Mounting | Panel mount | Universal mount |
| | Protection | 3mm protective glass | - |

| LCD Panel | Panel Size (diagonal) | 16.2-inch Widescreen TFT color LCD | |
|-----------|--------------------------------|------------------------------------|--|
| | Display pixel (dots x lines) | 1920 x 1200 | |
| | Brightness (typ.) | 300 | |
| | Contrast Ratio (typ.) | 800:1 | |
| | Color | 16.7M, 8-bit | |
| | Viewing Angle (L/R/U/D) | 89/89/89/89 | |
| | Response Time (ms) | 30 | |
| | Dot pitch (mm) | 0.191 | |
| | Display Area (mm) | 343.80H x 214.90V | |
| | Surface treatment | Anti-glare, Hard-coating | |
| | Surface hardness | 3H | |
| | Backlight Type | LED | |
| | MTBF (hrs) | 20,000 | |

| Video Connectivity | Digital | HDMI | HDMI 1.3, CEA-861-D |
|--------------------|-----------------|-------------------|---------------------------|
| | | DVI | DVI-D, TMDS single link |
| | Analog | VGA | Analog 0.7Vp-p |
| | | Composite (RCA) | NTSC & PAL |
| | | S-Video (4-pin) | NTSC & PAL |
| | Plug & Play | DVI / VGA | VESA EDID structure 1.3 |
| | Synchronization | VGA | Separate, Composite & SOG |

| Audio Connectivity | Audio Input | Connector | 3.5mm stereo jack |
|--------------------|--------------|--------------------------|-------------------|
| | | Impedance / Power level | 30kΩ / 750mV |
| | Audio Output | Connector | 3.5mm stereo jack |
| | | Resistance / Power level | 30kΩ / 2.8V |
| | Speaker | Dual Stereo Speaker | 2W x 2 |

*When the audio output is connected, speaker output is OFF

| Power | Power Supply | Range | Auto-sensing 100 to 240VAC, 50 / 60Hz |
|-------|-------------------|-------------------|---------------------------------------|
| | Power Consumption | Screen ON | Max. 34W |
| | | Power saving mode | Max. 4W |
| | | Power button OFF | Max. 1W |

16.2" High Resolution LCD Display

| | | |
|------------|---------------|-------------------------|
| Regulatory | Safety | FCC & CE certified |
| | Environmental | RoHS2 & REACH compliant |

| | | | |
|--------------------------|-------------------------|-------------|----------------------------------|
| Environmental Conditions | Operating | Temperature | 0 to 55°C degree |
| | | Humidity | 20~90%, non-condensing |
| | | Altitude | 16,000 ft |
| | Storage / Non-operating | Temperature | -20 to 60°C degree |
| | | Humidity | 5~90%, non-condensing |
| | | Altitude | 40,000 ft |
| | | Shock | 10G acceleration (11ms duration) |
| | | Vibration | 5~500Hz 1G RMS random |


| Physical Specification | | LCD-AP/NAP-X17 | LCD-OP-X17 |
|------------------------|-----------------------|---|---|
| | Product (W x D x H) | 468.5 x 57.1 x 331 mm 18.4 x 2.2 x 13 inch | 465.5 x 50.6 x 328 mm 18.3 x 2 x 12.9 inch |
| | Packing (W x D x H) | 615 x 113 x 523 mm 24.2 x 4.4 x 20.6 inch | 615 x 113 x 523 mm 24.2 x 4.4 x 20.6 inch |
| | Net Weight | 4.9 kgs / 10.8 lbs | 3.8 kgs / 8.4 lbs |
| | Gross Weight | 7.7 kgs / 16.9 lbs | 6.5 kgs / 14.3 lbs |

| | | | |
|-------------------|-------------------|--------------|---------------------------------------|
| Applicable Format | DVI-D / VGA Input | PC Signal | 1920 x 1200 x 60Hz |
| | | | 1360 x 768 x 60Hz |
| | | | 1280 x 1024 x 60 / 75Hz |
| | | | 1280 x 960 x 60Hz |
| | | | 1280 x 768 x 60 / 75Hz |
| | | | 1152 x 864 x 75Hz |
| | | | 1024 x 768 x 60 / 70 / 75Hz |
| | | | 848 x 480 x 60Hz |
| | | | 800 x 600 x 60 / 72 / 75Hz |
| | | | 720 x 400 x 70Hz |
| | | | 640 x 480 x 60 / 72 / 75Hz |
| | | | 640 x 400 x 70Hz |
| | | | 640 x 350 x 70Hz |
| | HDMI Input * | PC Signal | Same as VGA |
| | | | |
| | | Video Signal | 1080p : 60Hz |
| | | | 720p : 50 / 60Hz |
| | | | 480p : 60Hz |
| | | | 576p : 50Hz |
| | | Audio Signal | 2ch Linear PCM (32 / 44.1 / 48 KHz) |

*In some circumstances, if the user connects the LCD to PC via HDMI port for video and audio signals, the LCD may display incorrectly on a full screen. If so, please adjust the display card setting on display size to fix the issue.

< 3.2 > On-screen Display Operation (OSD)


- Power light
- Green = On
- Orange = Power saving



| Membrane Switch | Function |
|-----------------|--|
| | Power on / off LCD |
| | Display the OSD menu |
| | Scrolls through menu options and adjusts the displayed control (To auto adjustment by pressing the button for 5 seconds) |
| | Exit the OSD screen Toggle analog, digital & video connection (DVI-D and video options only) |


① Picture

| | |
|----------------|---|
| Picture mode : | Standard / Vivid / Soft / User mode to choose |
| Brightness : | Adjust background black level of the screen image |
| Contrast : | Adjust the difference between the image background (black level) and the foreground (white level) |
| Hue: | Adjust the screen hue value |
| Saturation : | Adjust the saturation of the image color |
| Picture size : | Adjust the image size |
| Color temp : | Standard / Cool / Warm / User to choose |
| Noise reduce : | Reduce the noise of the image |
| Sharpness : | Adjust the image from weak to sharp |

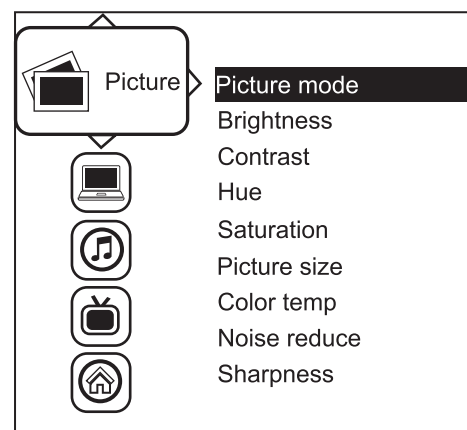


② PC

| | |
|---------------|---|
| Auto adjust : | Automatically adjust sizes, centers and fine tunes the video signal to eliminate waviness and distortion. |
| Clock : | Adjust the clock value |
| Phase : | Adjust the phase value |
| H. Position : | Align the screen image left or right |
| V. Position : | Align the screen image up or down |

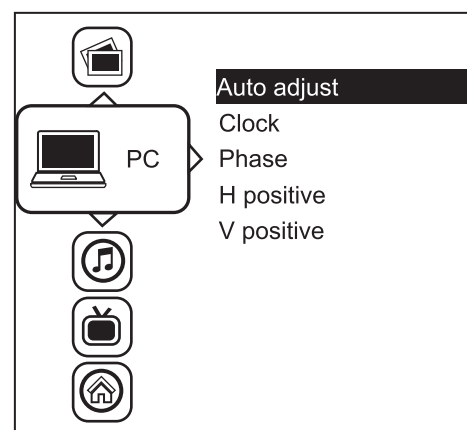


③ Audio

| | |
|-------------------|--|
| Audio mode : | Movie / Voice / Normal / Music mode to choose |
| Volume : | Adjust the volume of sound |
| Bass : | Set the value of bass sound |
| Treble : | Set the value of treble sound |
| Balance : | Set the balance value of treble and bass sound |
| Analog TV audio : | Set the value of analog TV audio sound |
| Mute : | Turn off the surrounding sound |

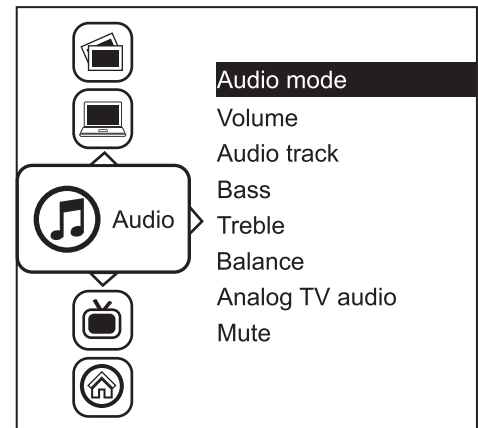


④ TV

| | |
|-----------------|-------------------------|
| Auto search : | Automatically search |
| Manual search : | Search the TV manual |
| Fine tune : | Fine tune the TV signal |
| Color system : | Adjust the TV color |
| Sound system : | Adjust the TV sound |
| Channel edit : | Edit the channel |

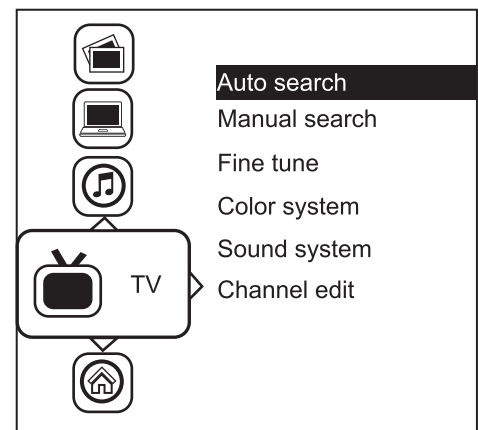

⑤ MISC

| | |
|----------------|--|
| Language : | Select the language in which the OSD menu is displayed - English |
| Sleep timer : | Set the off time |
| PIP mode : | Adjust picture in picture setting |
| PIP position : | Enter into PIP position |
| PIP source : | Enter into the Sub source and sound source |
| System reset : | Return the adjustment back to factory setting |
| Information : | Select for Help |

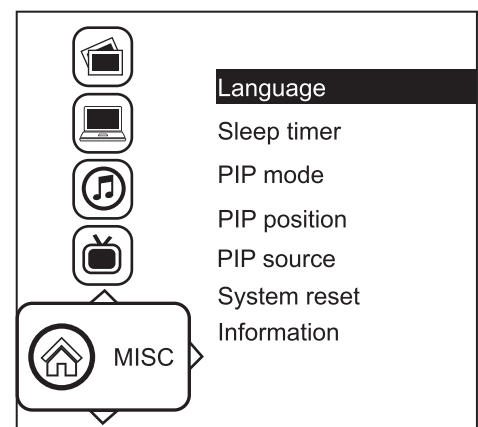


< 3.3 > How to Use Picture In Picture (PIP) / Picture By Picture (PBP)

< 3.3.1 > Picture in Picture (PIP)

Mode

Display the Sub screen in the Main screen.


OSD Menu → MISC → PIP Mode → Large / Small / OFF

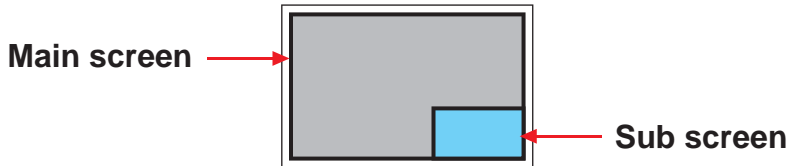


Position

Adjust the position of the Sub screen (top left, bottom left, top right, bottom right)


OSD Menu → MISC → PIP Position → top left / top right / bottom left / bottom right




top left



top right



bottom left



bottom right

Size

Adjust the size of the Sub screen (Large / Small)

OSD Menu → MISC → PIP Mode → Large / Small

Size of Sub screen

| LCD Monitor | Large Sub screen | Small Sub screen |
|-------------|------------------|------------------|
| 1920 x 1200 | 552 x 414 | 480 x 360 |
| 1920 x 1080 | 552 x 414 | 480 x 360 |
| 1440 x 900 | 414 x 310 | 360 x 270 |
| 1366 x 768 | 392 x 294 | 340 x 254 |
| 1280 x 1024 | 368 x 276 | 320 x 240 |

< 3.3.2 > Picture By Picture (PBP)

Mode

Display the Sub screen next to the Main screen.

OSD Menu → MISC → PIP Mode → PBP



Size

| LCD Monitor | Main / Sub screen |
|-------------|-------------------|
| 1920 x 1200 | 955 x 716 |
| 1920 x 1080 | 955 x 716 |
| 1440 x 900 | 715 x 536 |
| 1366 x 768 | 678 x 508 |
| 1280 x 1024 | 635 x 476 |

< 3.3.3 > PIP / PBP Source


To select an input signal for PIP / PBP Sub screen.

OSD Menu → MISC → PIP Source → VGA / S-Video / Composite / DVI / HDMI / SDI / YPbPr / TV

The PIP / PBP is operable in the following table :

| Main \ Sub | VGA | S-Video | Composite | DVI-D | HDMI | SDI | YPbPr | TV |
|------------|-----|---------|-----------|-------|------|-----|-------|----|
| VGA | X | O | O | O | O | O | O | O |
| S-Video | O | X | X | O | O | O | O | X |
| Composite | O | X | X | O | O | O | O | X |
| DVI | O | O | O | X | X | O | O | O |
| HDMI | O | O | O | X | X | O | O | O |
| SDI | O | O | O | O | O | X | X | O |
| YPbPr | O | O | O | O | O | X | X | O |
| TV | O | X | X | O | O | O | O | X |

< 3.4 > Remote Controller (RC-2)

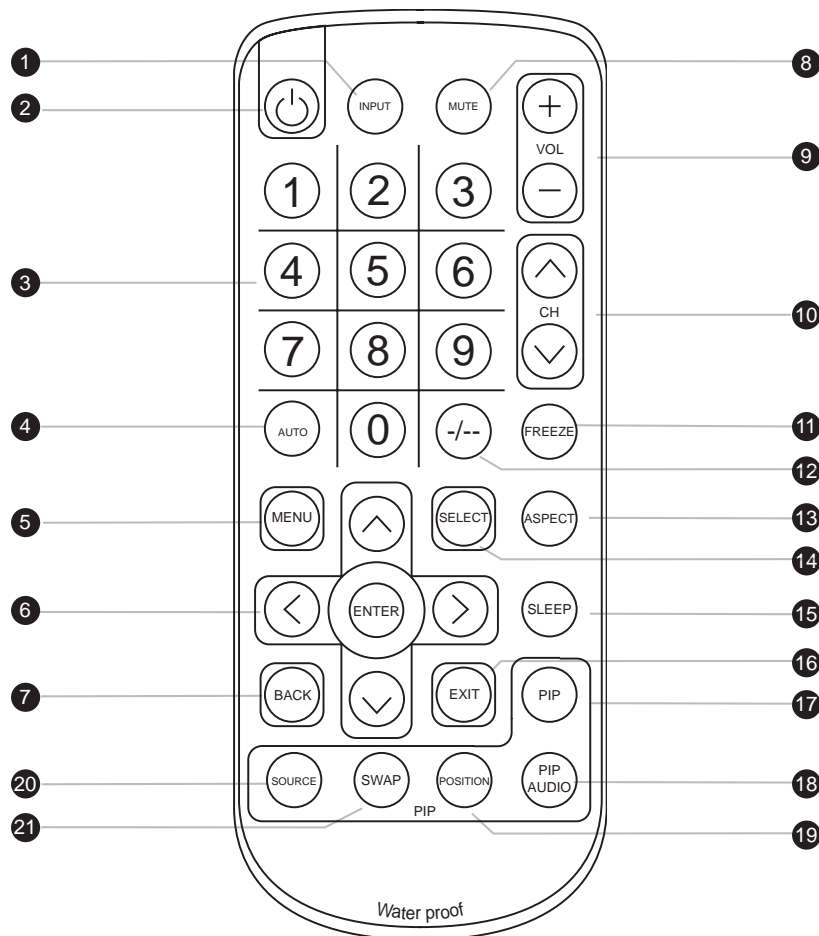

| | | |
|----------------------|------------------------------|--|
| ① | INPUT | Select the source |
| ② | | Switches on or off the TV |
| ③ | 0 - 9 | Only use in TV mode. Select channels. For channel numbers 10 and above, enter the second digit within two seconds. |
| ④ | AUTO | Auto adjust |
| ⑤ | MENU | Display the menu on the screen or go to the previous menu |
| ⑥ | ▲ / ▼ / ◀ / ▶ / ENTER | Go to the upper menu or select the previous value / Go to the next menu or select the next value / Decrease the setting value / Increase the setting value or enter to the select item setting Enter to the select item settings or excude the setting |
| ⑦ | BACK | Back to previous value |
| ⑧ | MUTE | Turn on or off the speaker |
| ⑨ | Vol + / - | Increase or decrease the speaker volume |
| ⑩ | CH + / - | For TV model only, increase or decrease the channel number |
| ⑪ | FREEZE | Reserve for OEM model |
| ⑫ | - / -- | For setting input single or double digits |
| ⑬ | ASPECT | Adjust the screen size |
| ⑭ | SELECT | To select the existing item |
| ⑮ | SLEEP | Select the sleeping time |
| ⑯ | EXIT | Exit the menu or cancel |
| PIP functions | | |
| ⑰ | PIP | Picture in picture |
| ⑱ | PIP AUDIO | To set the audio of in PIP mode |
| ⑲ | POSITION | To set the screen position in PIP mode |
| ⑳ | SOURCE | PIP Source |
| ㉑ | SWAP | Swap screen in PIP mode |

< 4.1 > Option Table

| Options | LCD-AP/NAP | LCD-OP-X17 |
|-------------------------------|------------|------------|
| SDI *** | ✓ | ✓ |
| Touchscreen | ✓ | ✓ |
| MCS multi-display control *** | ✓ | ✓ |
| DC Power | ✓ | ✓ |
| MIL-type / lockable connector | ✓ | ✓ |


< 4.2 > Options : 3G / HD / SD-SDI input



Crystal Image' SDI input is an ideal solution for the broadcast-grade video and high resolution CCTV market.

Designed for use with Crystal Image displays, a SDI input module can support up to 1080p @60Hz resolution without using additional space or power and it comes standard with a 2-year warranty.

SDI

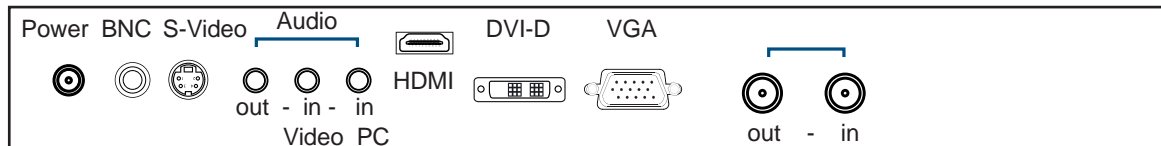

*** For **SDI** option, the AD board comes standard with HDMI, DVI-D, VGA, S-Video, BNC and audio inputs.

| | | |
|--------------|------------|--|
| INPUT | 3G-SDI IN | BNC x 1 / 0.8Vp-p (75 ohm) |
| | 3G-SDI OUT | BNC x 1 / Active through, equalized & relocked |

| | | |
|----------------------------|-------|---|
| Standard Compliance | Video | SMPTE 425M / 274M / 296M / 125M ITU-R BT.656 |
| | Audio | SMPTE 299M / 272M-C |


| | | | |
|--------------------------------|--------------|-------|------------------------|
| Compatible Video Format | 3G-SDI | 1080p | @60 / 50Hz, 4:2:2 |
| | | 1080p | @30 / 25 / 24Hz, 4:4:4 |
| | | 1080i | @60 / 50Hz, 4:4:4 |
| | | 720p | @60 / 50Hz, 4:4:4 |
| | HD-SDI | 1080p | @30 / 25 / 24Hz, 4:2:2 |
| | | 1080i | @60 / 50Hz, 4:2:2 |
| | | 720p | @60 / 50Hz, 4:2:2 |
| | SD-SDI | 480i | @60Hz, 4:2:2 |
| | ITU-R BT.656 | 576i | @50Hz, 4:2:2 |

| | | |
|--------------------------------|--------|---|
| Compatible Audio Format | 3G-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video |
| | HD-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video |
| | SD-SDI | 48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized / Asynchronized Video |

| | | |
|--|--------|-------------------|
| Max. Transmission Distance 75 ohm coaxial cable | 3G-SDI | 150m at 2.97Gb/s |
| | HD-SDI | 250m at 1.485Gb/s |
| | SD-SDI | 480m at 270Mb/s |

< 4.3 > Options : MCS

MCS (Multi-display Control)

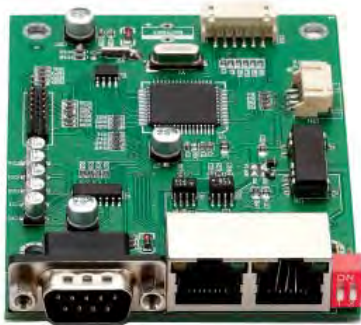


16.2" High Resolution LCD Display

More control is always good. Especially when it is necessary and easy. Crystal Image provides MCS solution to control the **OSD** of various LCD display up to 64 units.


The RS-232C is used for the communication between the PC and the first display via a 15 feet serial cable while the CAN bus is used for the various LCD displays cascade together via CAT 5/6 cable, and daisy chain up to 1,000 meters.

Designed for use with Crystal Image LCD displays, CIT provides a MCS input module without using additional space or power and it comes standard with a 2-year warranty.

MCS

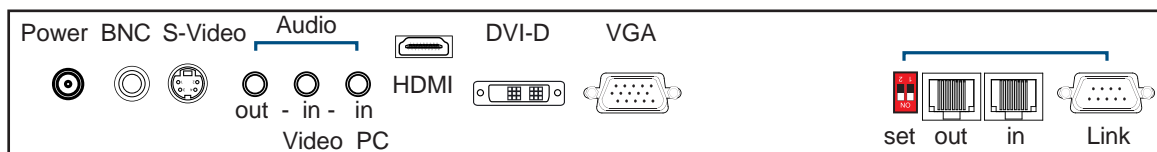

*** Please download the protocol of MCS control at :
<http://www.rackmountsales.com/v/pdf/citummcs.pdf>

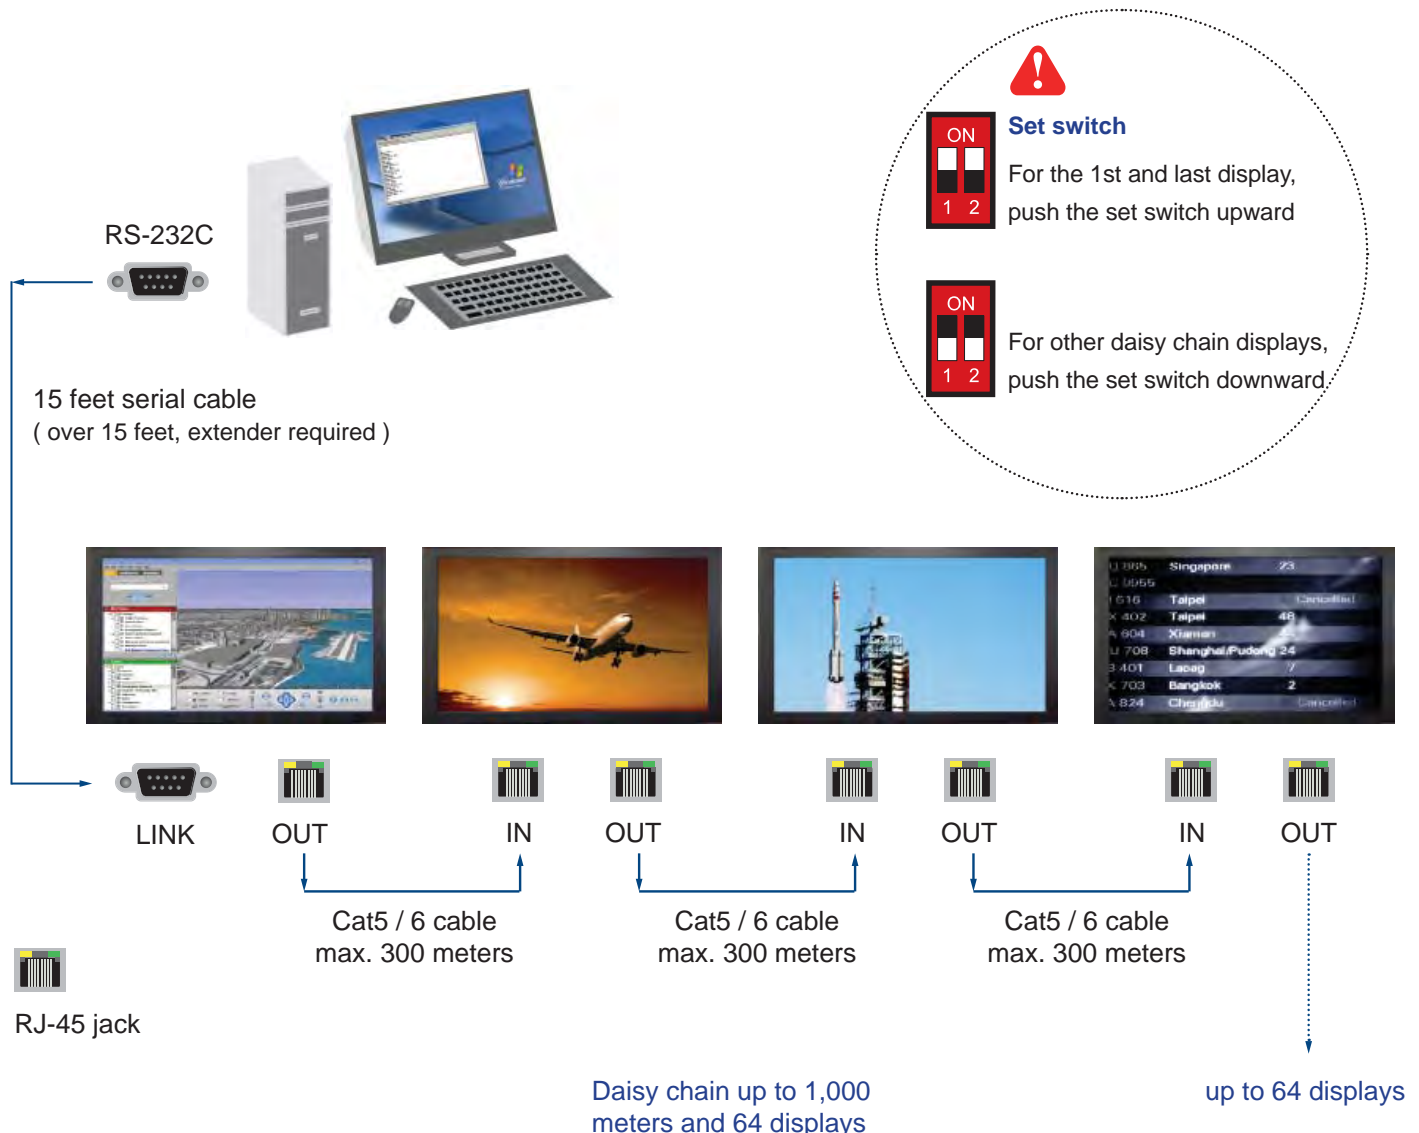

< 4.4 > Options : Touchscreen & driver




X17 USB Touchscreen Specification

| Model | TRB e-Resistive | TCB e-Capacitive |
|----------------------|-------------------------------|---------------------|
| Technology | 5-Wire Resistive | Capacitive |
| Touch Point | Single | Single |
| Input Type | Finger or Stylus | Finger |
| Resolution | 2048 x 2048 | 2048 x 2048 |
| Touch Point Accuracy | - | - |
| Response Speed | 15 ms | 20 ms |
| Activation Force | ≤ 50 g | ≤ 50 g |
| Surface Hardness | 3H | 9H |
| Light Transmission | 80% ± 3% | 92% ± 2% |
| Haze | 8% ± 3% | 7% |
| Durability | 10 million touches | 300 million touches |
| Top Layer | ITO Film | Glass |
| Bottom Layer | ITO Glass | |
| Thickness | 2.2 ± 0.2 mm | 2.8 mm ± 10% |
| Connector | USB Type A | USB Type A |
| Compatibility | Windows 7 / XP / Vista, Linux | |

- USB touchscreen package includes 1 x 6ft USB cable, quick reference guideline and CD disc
- For detailed information, please refer to the attached CD disc
- As the touchscreen unit is not made of toughened glass, please handle it carefully

USB Touchscreen

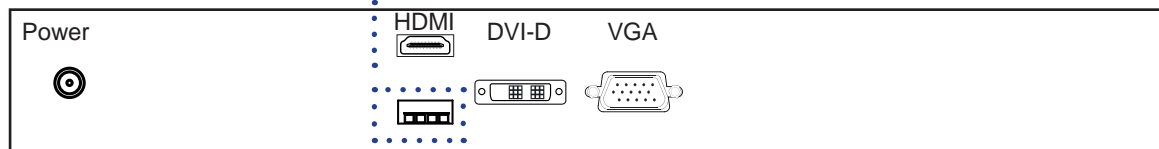

< 4.4 > Options : Touchscreen & driver



16.2" High Resolution LCD Display

TRB / TCB Driver

Please follow the below steps to setup the touch screen:-

Step 1. Run the bundled CD disc or download the driver from the link below :

http://www.eeti.com.tw/drivers_Win.html


Step 2. Double click the Setup.exe

Step 3. Follow the installation instruction to finish the setup


Step 4. After installation, run the TouchKit program & the "4 point calibration"



Please do the initial calibration after the first setup

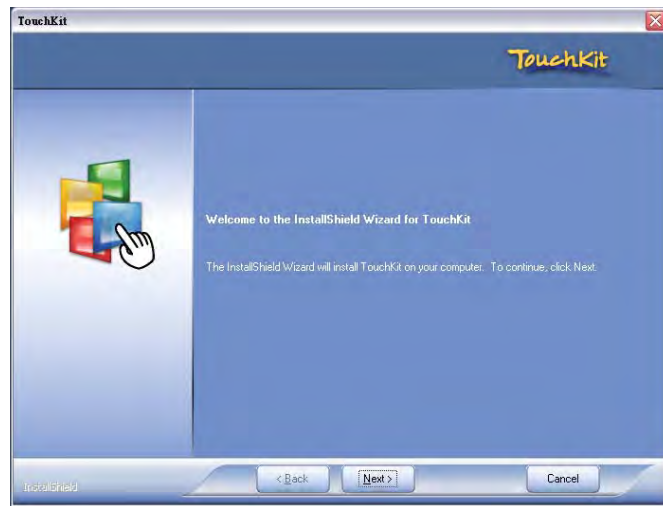

< 4.5 > Options : DC Power



| Model | 12V | 24V | 48V | 125V | 250V |
|----------------------|---------|----------|----------|-----------|------------|
| Input rating | | | | | |
| Input voltage: | 12-Volt | 24-Volt | 48-Volt | 110-Volt | 300-Volt |
| Input range: | 9 ~ 18V | 18 ~ 36V | 36 ~ 75V | 66 ~ 160V | 180 ~ 425V |
| Input current | | | | | |
| - No load | 50 mA | 50 mA | 50 mA | 35 mA | 10 mA |
| - Full load | 4950 mA | 2450 mA | 1220 mA | 749 mA | 600 mA |
| Output rating | | | | | |
| Output voltage: | 12-Volt | 12-Volt | 12-Volt | 12-Volt | 12-Volt |
| Output current: | 4.16A | 4.16A | 4.16A | 6.25A | 12.5A |
| Efficiency | 84% | 85% | 85% | 91% | 86% |

*** For DC power option :



(1) If the unit with LCD, **earthing** may be required



< 4.6 > Options : MIL-type or Lockable Connector

| | Input | Part no. | MIL Standard |
|----------------------|--------------------------|---|-------------------|
| MIL - type Connector | DC Power *** (Male) | MS3470W8-33P  | MIL - DTL - 26482 |
| | VGA *** (Male) | MS3470W14-15P  | MIL - DTL - 26482 |

*** There are several additional MIL DC and VGA connector types with varying design characteristics to meet cost considerations and to provide users with the most design flexibility possible. For more information, please contact us.

| | Input | Part no. | Standard |
|--------------------|----------------------|--|------------|
| Lockable Connector | DC Power (Male) | YM-Ext-461CP001  | D-type 3W3 |
| | USB | LUSB - A111 - 00  | - |

*** MIL - type or Lockable connectors above can be integrated with our LCD displays. Sale service just for connectors not provided.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

All brand names, logo and registered trademarks are properties of their respective owners.