




Benefits

- ▶ 1U 17" 4K Rackmount Monitor w/8 Port NIAP KVM
- ▶ 3840 x 2160 native resolution /16.7M colors (8-bit)
- ▶ 8 Port NIAP Protection Profile PSD 4.0
- ▶ NIAP - Keyboard/Mouse v 1.0 Video Display v 1.0
- ▶ Display port 1.2 video input / USB KB MS
- ▶ 104-key keyboard with touchpad mouse
- ▶ Built-in dual stereo speakers
- ▶ TAA Compliant - assembled in USA
- ▶ One Man installation design
- ▶ Includes 8, 6' DP KVM Cables

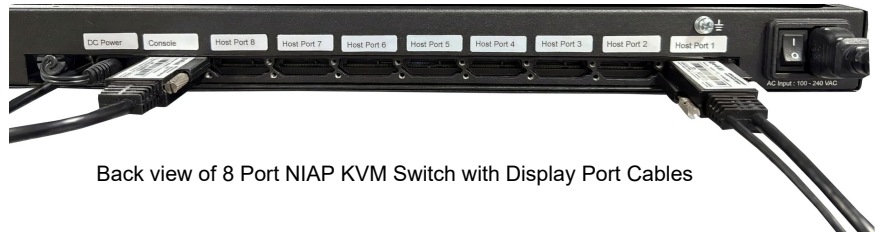

Back view of 8 Port NIAP KVM Switch with Display Port Cables

Product Specifications

Console Port

Video input	Display port 1.2
KB / MS	USB type B
8 Port NIAP KVM Switch	Drawer end : DP + USB type A (KB / MS) Server end : DP + USB type A

Video Option

Digital	DP	8, 6' DP KVM Cables Included
---------	----	------------------------------

LCD Panel

Panel size (diagonal)	17.3"
Native resolution	3840 x 2160
Brightness (cd/m ²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	30
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	20,000

Audio Option

Input	Connector	3.5mm stereo jack
	Impedance / Power level	30kΩ / 750mV
Output	Connector	3.5mm stereo jack
	Resistance / Power level	30kΩ / 2.8V
Speaker	Dual stereo	2W x 2

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 29W / Max. 38W
	Power saving mode	Max. 9W / Max. 18W
	Power button on	Max. 2W / Nil

Physical

Product (W x D x H)	Single console	N/A
	Console w/ KVM	442 x 600 x 44 mm 17.4 x 23.6 x 1.73 inch
Packing (W x D x H)	Single console / Console w/ KVM	590 x 808 x 140 mm 23.2 x 31.8 x 5.5 inch
Net weight	Single console	N/A
	Console w/ KVM	
Gross weight	Single console	15.8 kg / 34.8 lb
	Console w/ KVM	18.1 kg / 39.8 lb

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	20~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Mounting Distance

Single console drawer	N/A
Console w/ KVM drawer	490 ~ 800 mm 19.3 ~ 31.5 inch

Compliance




EMC	FCC & CE certified
Safety	CE / LVD certified
Environment	RoHS2 & REACH compliant

Part# RM-117K-BEL

Left-side View



Front View

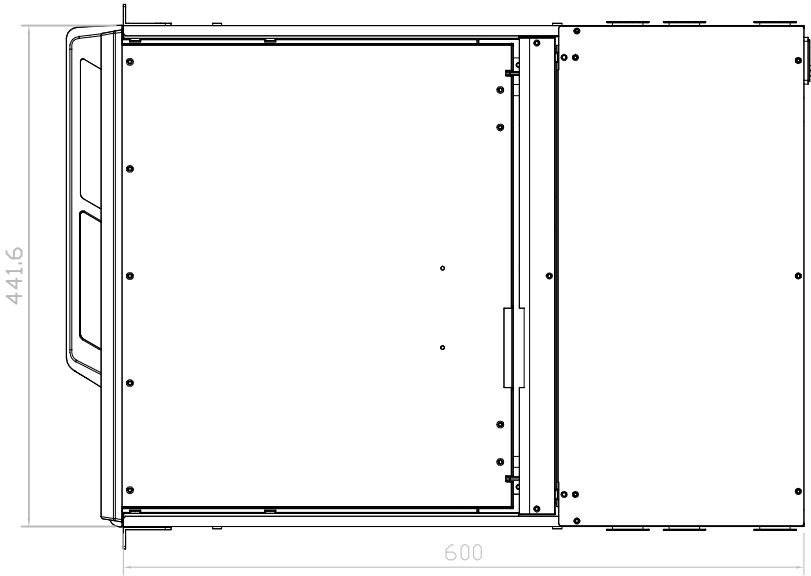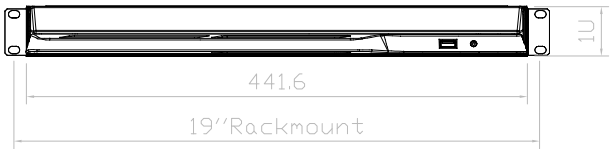

Top View

