

## Part# RMD-151-X17Ax3

### Features

- 2U foldable triple 17.3" widescreen LCD display Drawer
- Triple DVI & VGA input (X3)
- 1920 x 1200 WUXGA Ultra high resolution
- Supports FHD with 1080p resolution.
- Built in 2x 2 watts speakers
- Independent front osd control buttons to optimized display

### Option

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen



#### LCD Characteristics :

Screen Size	Triple 17.3"
Backlight Type	LED
Resolution	1920*1080 ( up to 1920*1200 )
Contrast Ratio	650:1
Brightness ( cd/m2 )	300
View Angles ( H/V )	140/120
Pixel Size ( HxV ) mm	0.1989x0.1989
Max. Color	262K
MTBF ( Hrs. )	50,000

#### Input Signals:

DVI-D	Triple DVI-D 24Pin Connector (Female)
VGA	Triple D-SUB 15Pin Connector (Female)
Audio	1 x 3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB ( option )	Triple USB A Type connector
Touch-RS232 ( option )	Triple D-SUB 9P connector ( Female )

#### Power Specifications :


AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input
Wide Range DC Power Input ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

#### User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD ( On Screen Display ) Buttons

#### Mechanical and Environment:

Height	2U Foldable
Rack Depth	550 to 950mm ( cabinet front rail to rear rail )
Mounting	Rack Mount with tilt adjustment
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension ( WxHxD )	482 x 88 x 580 ( mm )
Packing Dimension ( WxHxD )	735 x 590 x 235 ( mm )
Net Weight / Gross Weight	16.5 / 20 ( KGs )
Certification and Approvals	CE / FCC / RoHS

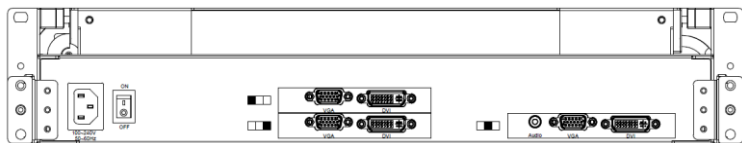

Rear of RMD-151-X17Ax3

