

KVM-08R / KVM-16R



Combo DB-15 2-console KVM Benefits


- ▶ Combo DB-15 KVM with either 8 or 16 ports in 1U
- ▶ Remote access up to 150 meters
- ▶ Cascade switches up to 8 levels & Mix switches between Cat6 & Combo DB-15 KVM
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Cost efficient remote server management between user & equipment rooms within the building

Switch Features & Options



- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations

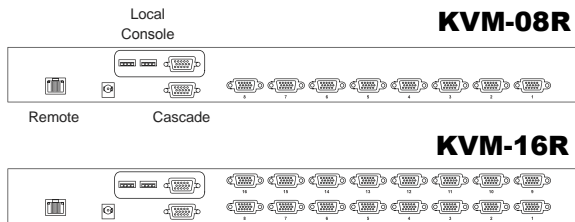

12V, 24V and 48V DC Power options




Ordering Information

Console	Local	Remote	IP	8-port	16-port
 	1	1	0	KVM-08R	KVM-16R

KVM Specification


■ KVM Port Number of ports: 8 or 16 Connector: DB-15 combo connector Connectivity: Combo 4-in-1 KVM cable, up to 6, 10 & 15 feet		■ Power Input: 100 or 240V AC at 50 or 60 Hz via IEC type cord Option DC: 12V / 24V / 48V DC input Consumption: Max. 24 Watt, Standby 5 Watt	
■ Local Console Graphic Connector: 1 x DB-15 VGA Resolution: Up to 1600 x 1200 Input device: 2 x USB type A for keyboard & mouse		■ Regulatory Approval: cUL, FCC, CE	
■ Remote Console Connector: 1 x DB 15-pin, VGA Resolution: Up to 1600 x 1200 Input device: 2 x USB type A for keyboard & mouse Remote I/O: RJ45 via Cat5 / Cat5e / Cat6 cable up to 150m Compensation: Auto adjust for cable length		■ Environmental Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58~100Hz / 0.98G (11ms / cycle)	
■ Expansion: Up to 128 servers by 8-level cascade		■ Product Information Dimension (W x D x H): 443 x 171 x 43.6 mm / 17.4 x 6.7 x 1.72 inch Net weight: 3 kg / 6.5 lb	
■ Compatibility Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix		■ Packing Information Dimension (W x D x H): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch Gross weight: 5 kg / 11 lb	

KVM port connection

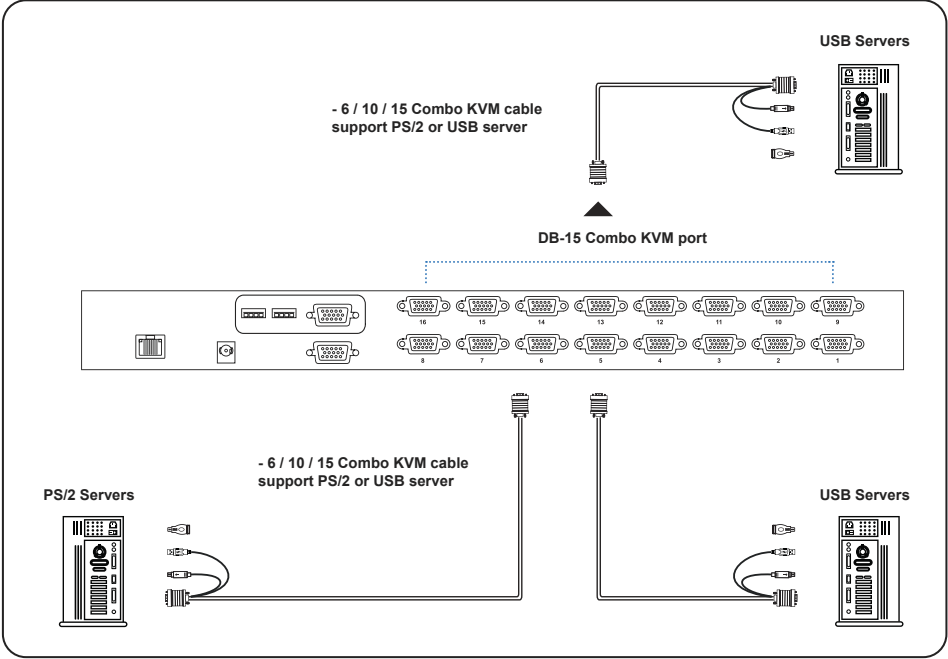


KVM-COMBO-6 / -10 / -15
■ 6 / 10 / 15 ft Combo KVM cable
■ Support PS/2 or USB server

Remote & Local console connection

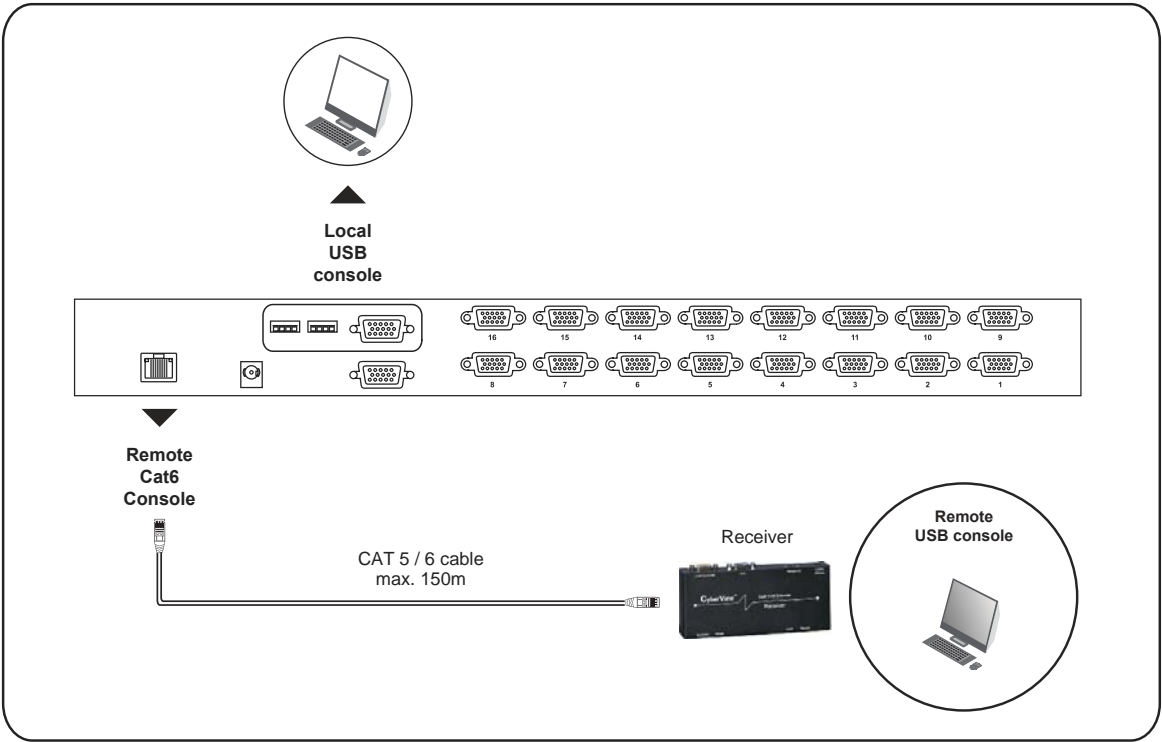

KVM Cascade

- Cascade up to 8 levels, 128 servers
- Cascading multiple KVM with CBC-6 cascade cable.

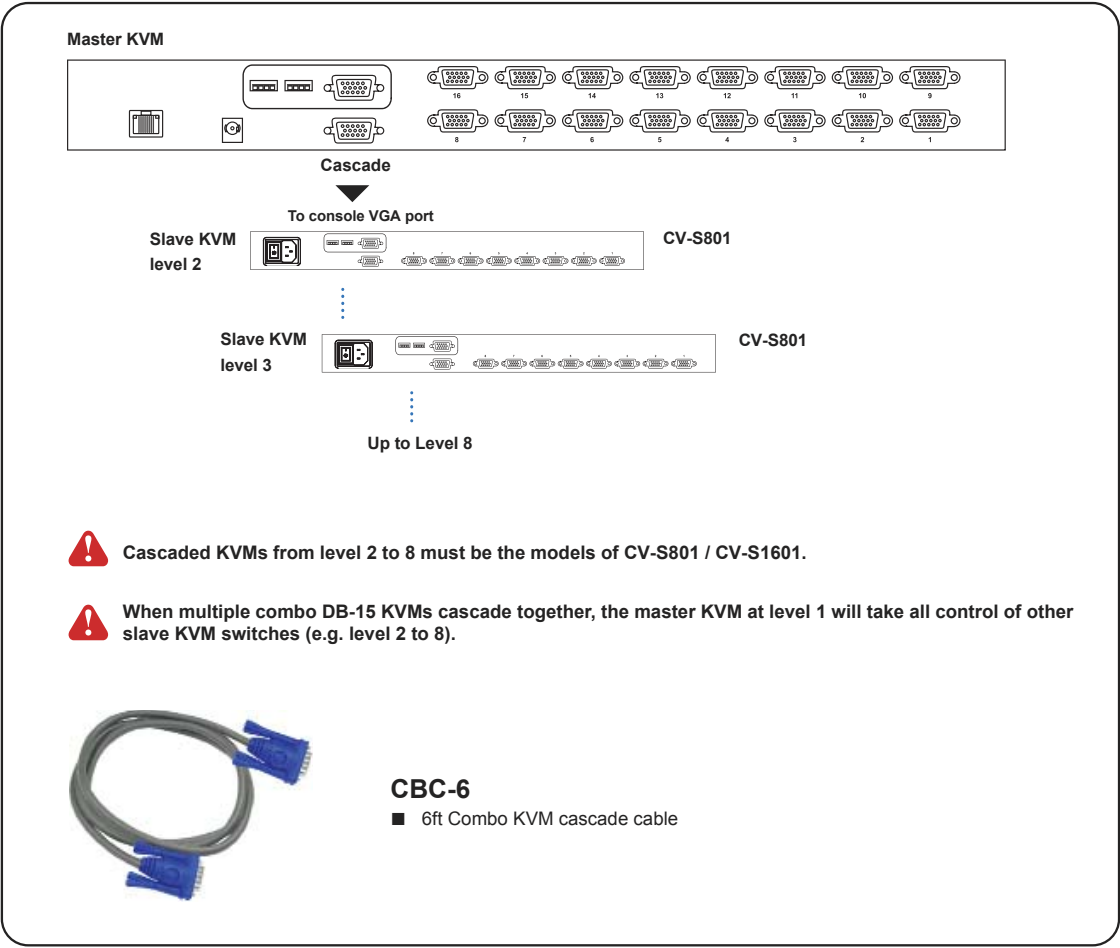

- ⚠ Cascaded KVMs from level 2 to 8 must be the models of CV-S801 / CV-S1601.
- ⚠ When multiple combo DB-15 KVMs cascade together, the master KVM at level 1 will take all control of other slave KVM switches (e.g. level 2 to 8).

⚠ For detailed product specifications and options, please download the user manual from the link below : www.austin-hughes.com/support/usermanual/cyberview/UM-CV-SKVM.pdf