


# Part# RM-111-19A-MIL

## Features

- MIL-STD-810F/G Compliant
- DVI & VGA Input
- 1U 19" Rackmount Monitor, 1280 X 1024 Resolution
- Wide Operating Temperature (-20C to 70C)
- 3 USB Accessory HUBS – 1 Front, 2 Rear USB 2.0 Type A (for flash drive, hard drive, KB/Mouse etc)
- Sealed 104-key IP65 silicone backlit keyboard w/ touch pad
- USB 2.0 Keyboard & Mouse
- Self-locking and auto release rails for convenience.
- MIL power input connector

## Option

- DC 9~36 power input
- High Brightness – 1000 nits
- Front AR or EMC glass protected screen
- Touchscreen

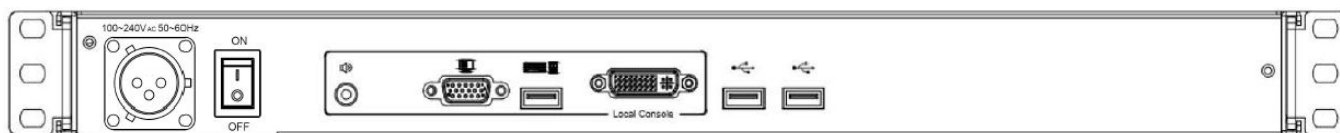

Locking Power

VGA

USB

DVI

USB Accessory

Part No.	RM-111-19A-MIL	
Direct no. of Computers	1	
KVM Connectors	VGA, USB	
LCD	Size	19"
	Backlight	LED
	Resolution	1280 X 1024
	Max.color	16.7M
	Luminance	450cd/m2
	View Angel (H/V)	170 / 160
	Contrast Ratio	1000 : 1
USB HUB	1x Front , 2x Rear USB 2.0 Type A for peripheral USB devices	
Touch Screen	YES - optional touchscreen	
KB/Mouse Emulation	USB 2.0	
Audio	NO Audio	
Rack Mounting Range	26" to 34" ( front rails to rear rail )	
Power	100-240V AC 50/60Hz via pin lock connector	
Environment (MIL-STD-810G)	Operation temp: -20 to 70°C (MIL-STD-810, Method 501.5 & 502.5)	
	Storage temp: -30 to 80°C (MIL-STD-810, Method 501.5 & 502.5)	
	Humidity: 5% - 95%, non-condensing (MIL-STD-810, Method 507.5)	
	Shock/Vibration: Procedure VI - 50G acceleration ( 11ms duration) – MIL-STD-810, Method 516.6 Altitude: 10,000 ft Operational, 30,000 Storage (MIL-STD-810, Method 500.5)	
Physical Dimensions / Net Weights	19" x 1.65"x 26" (WxHxD) / 31lbs	
Packing Dimensions / Gross weights	28.3" x 6.3"x 33.85" (WxHxD) /44lbs	
Accessory		
1.8 meter Power Cord with 3 pin lock connector, 1.8 meter VGA Cable , 1.8 meter USB Cable		