



### Features

- 1U Flip-down 19" rack mount (G#)
- 19" 1280 x 1024 resolution
- DVI-D, VGA, Audio input
- Heavy duty steel chassis construction
- Front (O) control buttons to optimize display
- Built in 2x 2watts stereo speakers
- (G#) "angle" 0°~104°

### Options

- Composite video input
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

### LCD Characteristics :


Screen Size	19"
Backlight Type	LED
Resolution	1280*1024
Contrast Ratio	1000:1
Brightness ( cd/m2 )	350
View Angles ( H/V )	170/160
Pixel Size ( HxV ) mm	0.294x0.294
Max. Color	16.7M
MTBF ( Hrs. )	50,000

### Input Signals:

DVI-D	DVI-D 24Pin Connector (Female)
VGA	D-SUB 15Pin Connector (Female)
Audio	3.5" Jack
Power Input	Standard IEC Inlet
Touch-USB ( option )	USB A Type connector
Touch-RS232 ( option )	D-SUB 9P connector ( Female )

### Power Specifications :

AC Power Input	Standard IEC Type Power Cord with Internal Power adapter, 100-240V AC Input
Wide Range DC Power Input ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

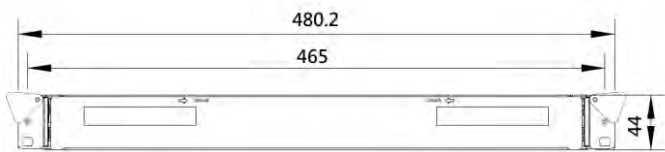

Rear of RMD- 19U"

### User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD ( On Screen Display ) Buttons

### Mechanical and Environment:

Height	1U Foldable
Rack Depth	20" to 36" ( cabinet front rail to rear rail )
Mounting	Rack Mount with tilt adjustment
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	448*44*508 (mm)
Packing Dimension (WxHxD)	790*190*580 (mm)
Net Weight / Gross Weight	17.5 / 21 (KGs)
Certification and Approvals	CE / FCC / RoHS

